



Hannspree Hannspad SN1AT71 Back Panel Replacement

The first step in fixing your Hannspad is taking off the back panel. The back panel on the Hannspad is different than most tablets in that it wraps around the tablet, so the seam is right next to the screen on the front.

Written By: matthew vandeventer



INTRODUCTION

The Hannspad has a deceptive back panel that will not separate. Dont lose hope; it is not the real back panel, it is just there for aesthetics. The actual way to take the back panel off is at the seam around the edge of the screen. Follow these steps to protect your screen, and easily take the back panel off your Hannspad.



TOOLS:



- [Metal Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Back Panel Replacement



- Turn the device off.
 - Place the tablet screen side up.
- ⚠ Make sure the device is turned off to avoid damage.

Step 2

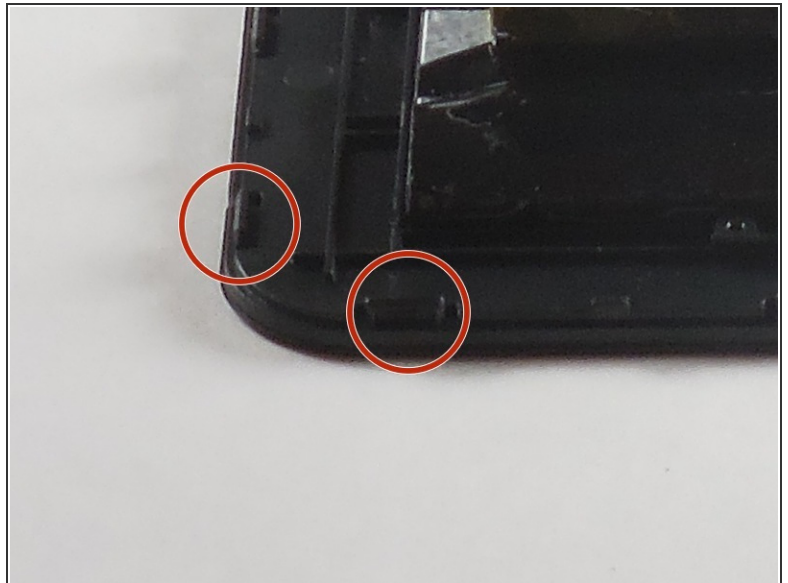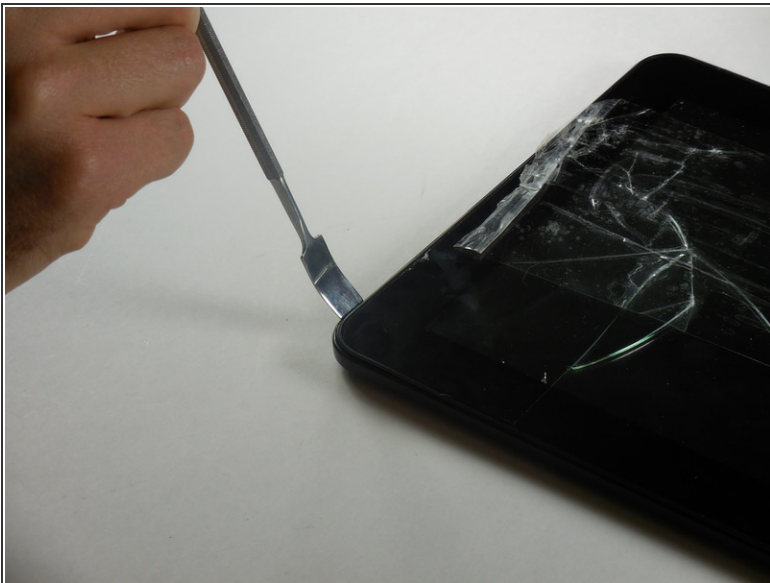


- Use the metal spudger to press an opening between screen and back cover.

- Plastic tabs



⚠ Be careful, as the plastic tabs are delicate.

Step 3

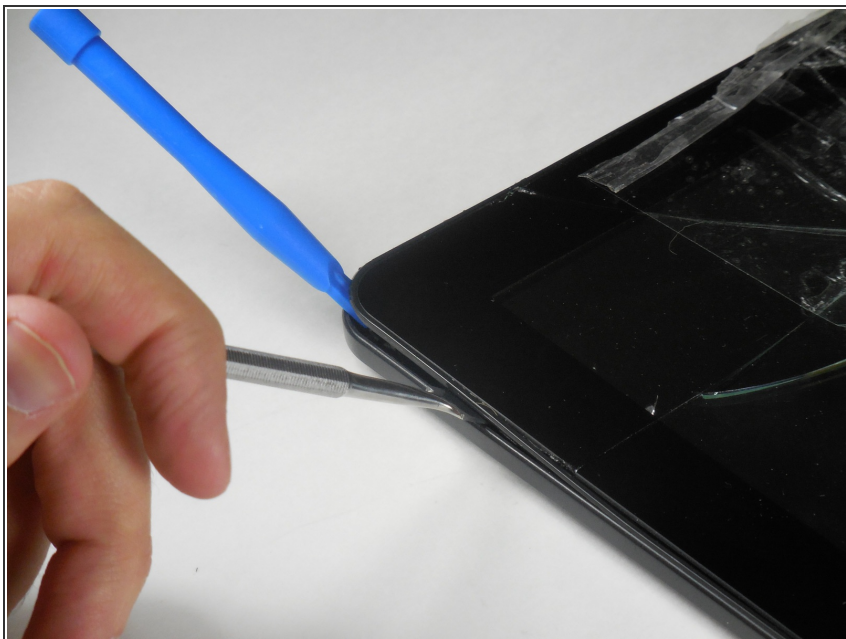

- Wedge the plastic opening tool between the screen and the back panel to keep tension constant.

Step 4

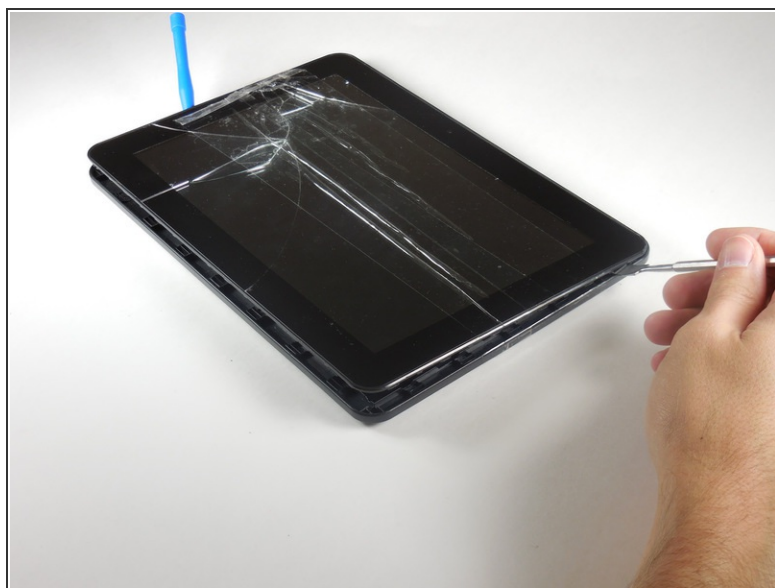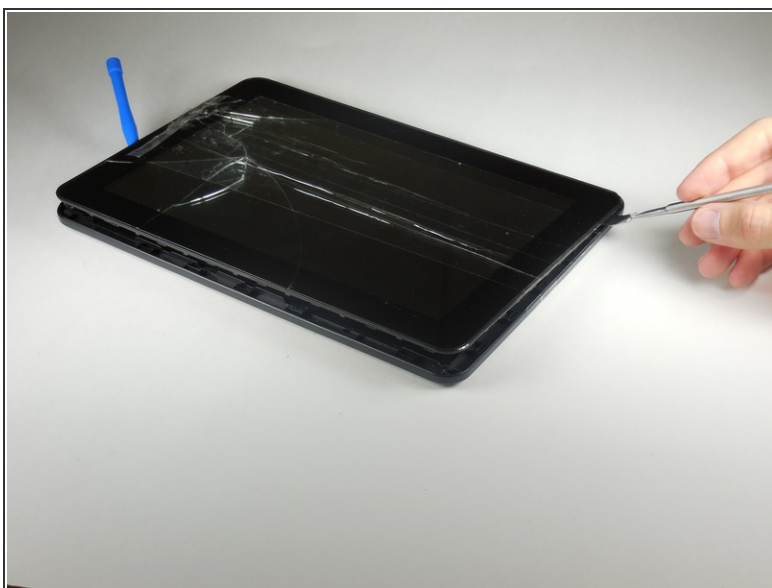

- Slide the metal spudger around the casing to separate it from the inside of the tablet.

Step 5



- After all the tabs are separated, flip tablet over so the screen side is down.
- Remove the back panel by delicately lifting straight up.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 06:21:43 PM.